

STPXXXS – B72/Pnhg

-455W 20.9%

20.9%	↓			
2%		3800	5400	*
	E Harsh			

**

IEC 61730
IEC 61215

ISO 9001
ISO 14001
ISO 45001



STPXXXS - B72/Pnhg 435-455W

144 (6 × 24)

STP-XC4

IP68

-40 ° C - +85 ° C

1500 V DC (IEC)

20 A

0/+5 W

(70 ± 5)%

2125 × 1130 × 1205
814

STP455S-B72/Pnhg		STP450S-B72/Pnhg		STP445S-B72/Pnhg		STP440S-B72/Pnhg		STP435S-B72/Pnhg	
STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
455	343.1	450	339.4	445	335.8	440	332.7	435	328.9
41.6	38.4	41.4	38.2	41.2	38.0	41.0	37.8	40.8	37.7
10.94	8.94	10.87	8.89	10.81	8.84	10.74	8.78	10.67	8.73
49.4	46.3	49.2	46.2	49.0	46.0	48.8	45.8	48.6	45.7
11.67	9.42	11.61	9.37	11.54	9.31	11.47	9.25	11.40	9.20
20.9		20.7		20.4		20.2		20.0	

2

2

+/- 3%

(455S)


	5%	15%	25%
STC	467.3	511.8	556.3
	41.2	41.2	41.3
	11.35	12.43	13.51
	49.0	49.0	49.1
	12.12	13.27	14.43
	21.4	23.5	25.5

42 ± 2 ° C

-0.36%/° C

-0.304%/° C

0.050%/° C

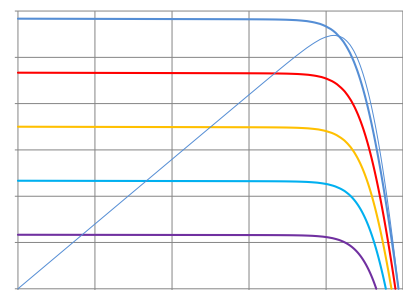

1000 W/m² 800 W/m² 600 W/m² 400 W/m² 200 W/m²