


# Ultra S mini



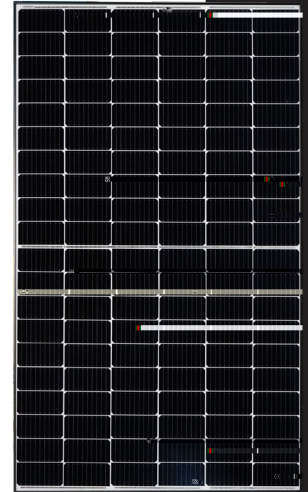


A 


A  A



: - 60/



365-385      A    
 21.1%

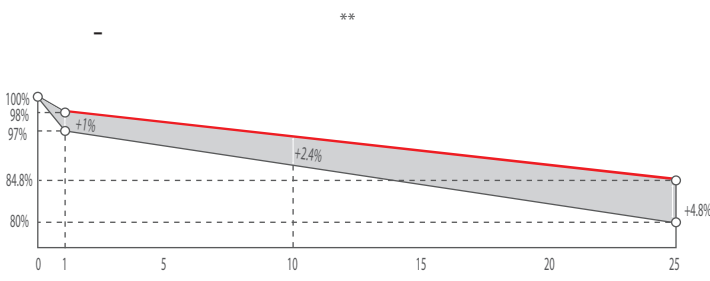 <p>21.1%</p>	
<p>2%</p>	 <p>(5400 ) *      (3800</p>
	



  
 CE IEC 61730 IEC 61215  
 SA 8000  
 ISO 9001  
 ISO 14001  
 ISO 45001 Occupational Health and Safety  
 IEC TS 62941 

A : 0.55%      : 2%      : 12      : 25



**Munich RE**  \*\*\*\*



**STPXXXS - B60/Wnhm 365-385W**



	166
	120 (6 20)
	1756 1039 35 (69.1 40.9 1.4 )
	20.3 (44.8 .)
	3.2 (0.126 )
	4.0 <sup>2</sup> , (-) 350 (+) 160
	68 (3 )
	-40 +85
	1000 / 1500 ( )
	20 A
	0/+5



	385 - 60/		380 - 60/		375 - 60/		370 - 60/		365 - 60/	
( / )	385	290.9	380	286.3	375	281.9	370	278.2	365	274.3
( / )	34.9	32.4	34.7	32.2	34.5	32.2	34.3	32.0	34.1	31.8
( /A)	11.04	8.99	10.96	8.92	10.87	8.76	10.79	8.69	10.71	8.62
( / )	41.5	39.0	41.3	38.9	41.1	38.9	40.9	38.7	40.7	38.5
( /A)	11.72	9.46	11.64	9.39	11.57	9.24	11.49	9.17	11.42	9.10
(%)	21.1		20.8		20.6		20.3		20.0	

1000 / <sup>2</sup>, 25 A =1.5; : 800 / <sup>2</sup>, 20 A =1.5, 1 / ; +/- 3%;




( )	42 2
	-0.36%/
	-0.304%/
	0.050%/



	20	40
	31	31
	6	26
	186	806
	1786 1130 1203	
	679	

**Graphs**

(385 )

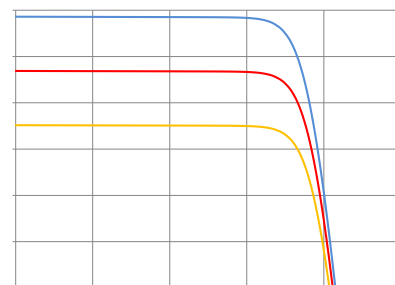

1000 / <sup>2</sup> 800 / <sup>2</sup> 600 / <sup>2</sup> 400 / <sup>2</sup> 200 / <sup>2</sup>